







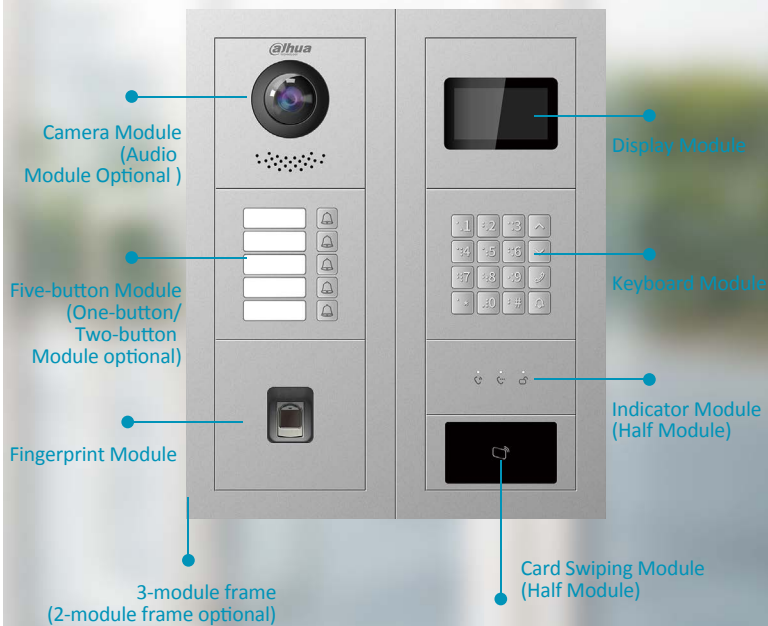


# VIDEO INTERCOM

## IP Modular Outdoor Station

- 2.0MP CMOS camera
- Large field of view
- Night vision
- Voice indicator
- Echo cancellation
- Modular design (Max 9 modules, DHI-VTO4202F-P / VTO4202F-MA needed)



IP Modular Outdoor Station				
	Modular Outdoor Station Modules			
	DHI-VTO4202F-P	VTO4202F-MA	VTO4202F-MB1	VTO4202F-MB2
Model				
Image Sensor	1/2.5" 2MP CMOS	—	—	—
Lens	2mm	—	—	—
Angle of View	D:160°	—	—	—
Day/Night	ICR	—	—	—
Screen	—	—	—	—
Reader	—	—	—	—
Keypad	—	—	Mechanical Button	Mechanical Button
Indicator light	—	—	—	—
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	—	—
Ingress Protection	IK07, IP65	IK07, IP65	IK07, IP65	IK07, IP65
Tamper Switches	1	1	—	—
Ethernet	10M/100Mbps	10M/100Mbps	—	—
Installation	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush
Material	Alumimum	Alumimum	Alumimum	Alumimum
Working Temperature	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)
Power Supply	DC12V, 2-Wire or PoE(802.3af) Max 12W	DC12V, 2-Wire or PoE(802.3af) Max 12W	DC 5V/1W (Powered from main modules)	DC 5V/1W (Powered from main modules)

IP Modular Outdoor Station							
	Modular Outdoor Station Modules						
	VTO4202F-MB5	VTO4202F-MS	VTO4202F-MF	VTO4202F-MK	VTO4202F-ML	VTO4202F-MR	VTO4202F-MN
Model							
Image Sensor	-	-	-	-	-	-	-
Lens	-	-	-	-	-	-	-
Angle of View	-	-	-	-	-	-	-
Day/Night	-	-	-	-	-	-	-
Screen	-	3.0" STN	-	-	-	-	-
Reader	-	-	Fingerprint	-	-	Mifare Card	-
Keypad	Mechanical Button	-	-	Mechanical Button	-	-	-
Indicator light	-	-	-	-	Calling/Answer/Unlock	-	-
Door Control	-	-	-	-	-	-	-
Ingress Protection	IK07, IP65	IK07, IP65	IK07, IP65	IK07, IP65	IK07, IP65	IK07, IP65	IK07, IP65
Tamper Switches	-	-	-	-	-	-	-
Ethernet	-	-	-	-	-	-	-
Installation	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush
Material	Alumimum	Alumimum	Alumimum	Alumimum	Alumimum	Alumimum	Alumimum
Working Temperature	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)	-20°C~+60°C (-4°F~+140°F)
Power Supply	DC 5V/1W (Powered from main modules)						